



# Coral Coast®



**ITEM NAME: Coral Coast Wimberley Padded Sling  
Swivel Rocker Dining Chair  
SKU: ALH1975-1**

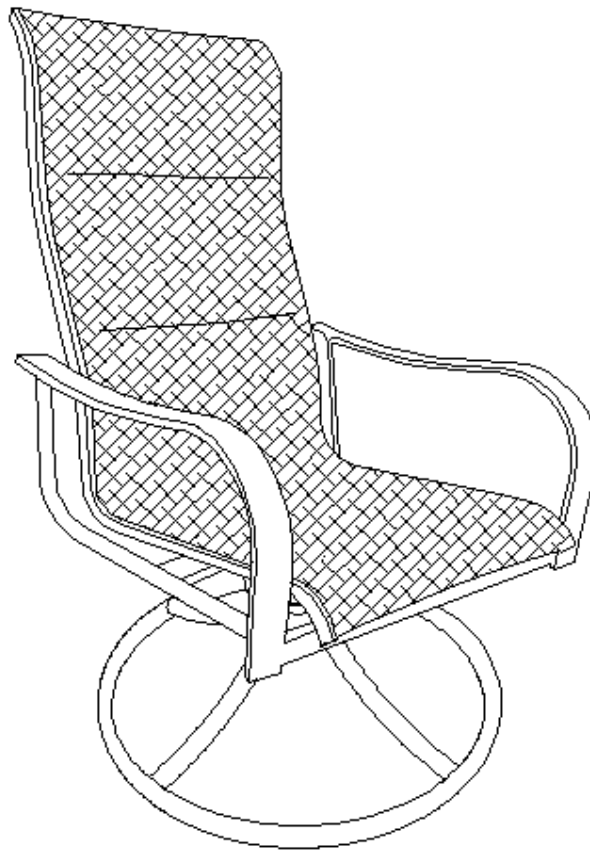

**For assistance with assembly, please contact customer service**

**1-888-880-4884**










## WARNING!

- Chairs have a 250 lbs weight capacity.
- Hang cushion over chair frame to dry if it gets wet to prevent mold/mildew.

Please read instructions carefully and thoroughly before assembling. Check parts against the parts list to make sure you have all the parts needed for proper assembly. Familiarize yourself with the inventory of parts and the accompanying illustrations to ensure safe and proper assembly.

Place the chair on a non-abrasive flat surface to prevent scratching.

## PARTS LIST

PART	DESCRIPTION	PICTURE	QTY
A	CHAIR SEAT		1
B	CHAIR BASE		1
C	BOLT (5/16"X40MM)		4
D	METAL PLATE		4
E	FLAT WASHER		4
F	LOCK WASHER		4
G	NUT		4
H	BOLT CAP		8
I	WRENCH		1

← A

1

Remove all protective material carefully. Avoid cutting the surface of the furniture while removing the packaging material.

Remove the Bolt (C), Metal Plate (D), flat washers (E), lock washers (F) and nuts (G) from the spring late for chair seat (A).

Place the chair seat (A) on a non-abrasive flat surface. Align the holes on the support bar on the underside of the chair seat with the holes on the spring plates attached to the t-rocker that is pre-attached to the chair base (B). Make sure the arrow labels on the rocker mechanism and chair support bar are facing the same direction—towards the front of the chair. Insert bolts (C) through the metal plates (D), support bar, spring plate and the metal plates (D) as showed in the diagram. Secure bolts with flat washers (E), lock washers (F) and nuts (G). The support bar and spring plate should be sandwiched in between the metal plates (D).

**Warning: Improper assembly may result in serious personal injury.**

Once all the nuts and bolts are in place, securely tighten all the bolts (C) and nuts (G), including the ones at the front part on the rocker mechanism with the wrench (I). Cover all bolts with bolts caps (H). (FIGURE 1)

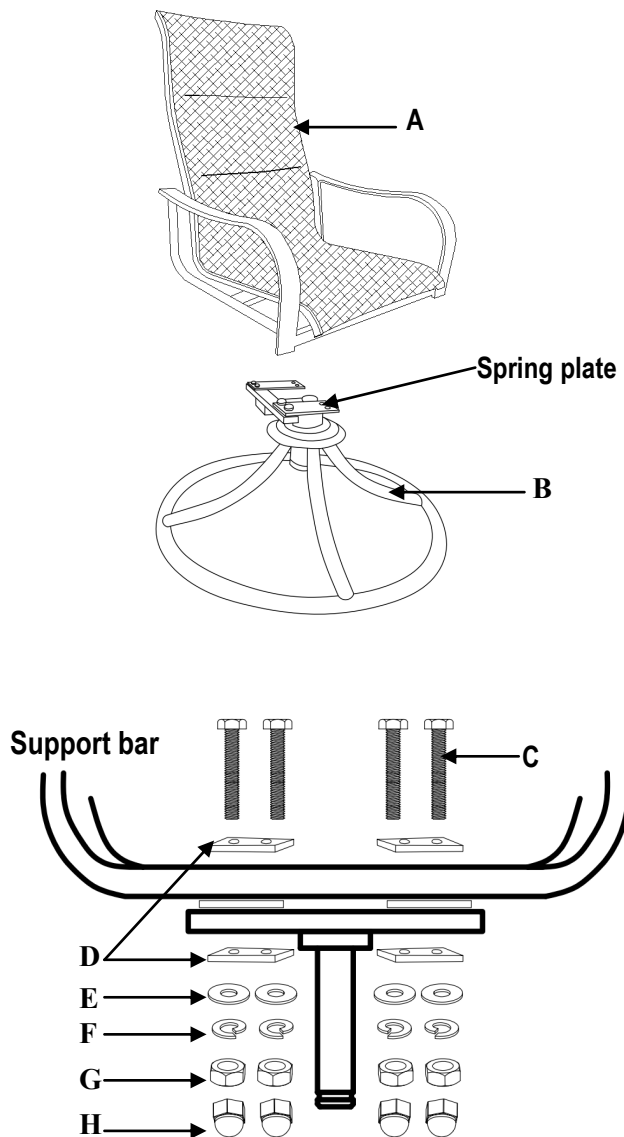


Figure 1

2

Test the swivel rocker gently. If the rocker does not rock properly, double check the assembly procedure, especially step 1.

**REPEAT ABOVE STEPS TO ASSEMBLE THE OTHER ROCKING CHAIR.**

(FIGURE 2)

Your end chair is ready for enjoy now.

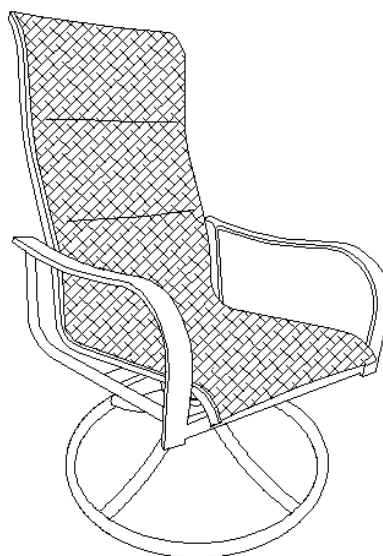


Figure 2