




Porch Swing

(PS48U Unassembled Kit)

Tools Needed: #2 Philips or Robertson screwdriver, wood glue and a ½ wrench.

Package Contents:

- (A) Arms...2
- (B) Arm Supports...2
- (C) Back Posts...3
- (D) Seat Supports...3
- (E) Scalloped Front Rail...1
- (F) Seat Slats...12
- (G) Narrow Top Slat...1

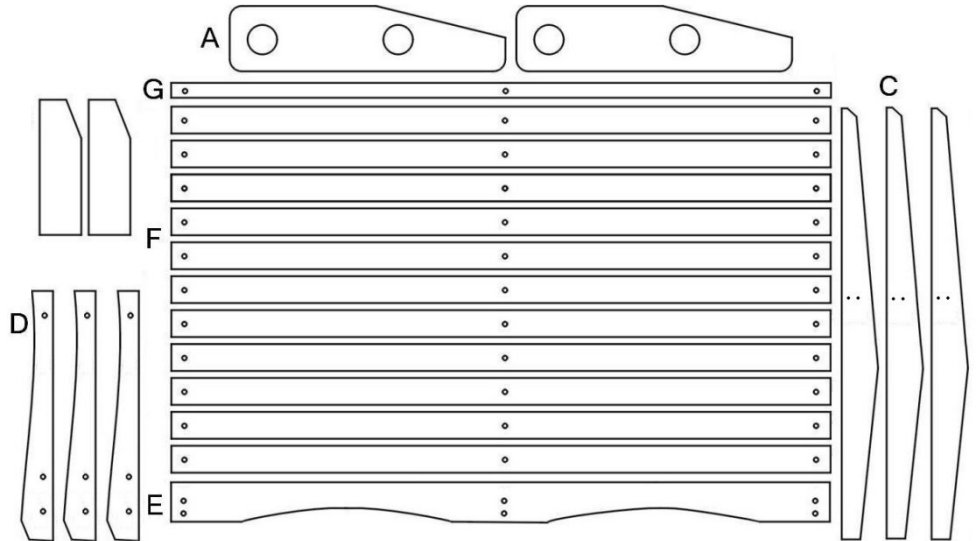


Hardware

- 2 ½" screw...8
- 1 ¾" screw...45
- 3 ½" Carriage bolt...2
- 3" Lag Screw...3
- 3 ½" Eye bolt...4
- Washer...9
- Hex Nut...6
- Quick Link...6
- Chain... (4 pcs)
- 3/8" Spacer... 2


STEP 1. Build Frame

- Attach the Front Rail (E) to the 3 Seat Supports (D) using 1 ¾ inch screws.

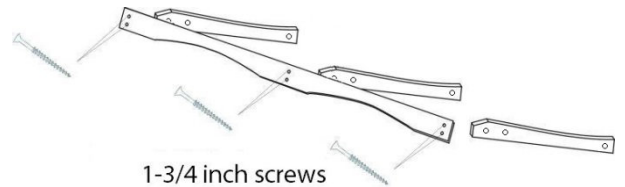


STEP 2. Attach Seat Slats

- Beginning from front of seat, attach a seat slat directly behind front rail, then use the 3/8 inch spacer to lay out remaining 5 seat slats across the seat supports and attach using 1 ¾ inch screws.

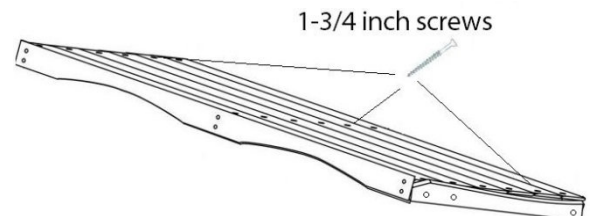


STEP 3. Attach Posts

- Attach the 3 Back Posts (C) to the seat supports using lag screws and washers.

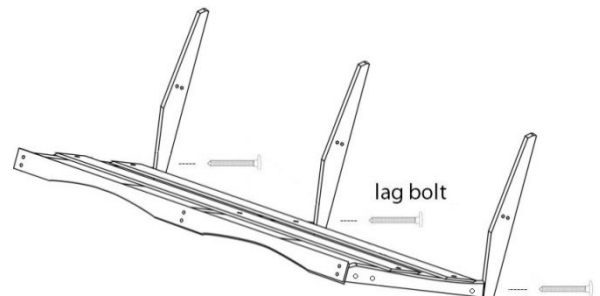


STEP 4. Attach Back Slats

- Tip the swing so that it is resting on the 3 Back Posts and attach the **narrow top slat (G)** along the top of the swing.
- Using the 3/8" spacer evenly space and attach the remaining 6 slats to the back posts starting from top slat down.

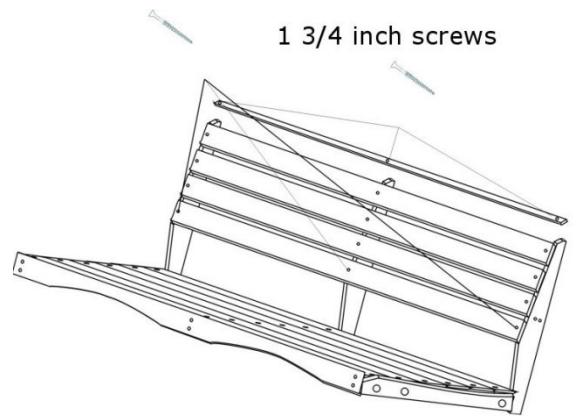

STEP 5. Attach Arms

- Mount Arm Supports to side of the Swing using Carriage Bolts.
- Set front of arm over arm support and align rear arm with pre-drilled holes in back post - make arm flush with back post and attach arm using 2-1/2 inch screws.
- Make inside of arm flush with arm support and attach arm to arm support using 2-1/2 inch screws. (glue is optional here)

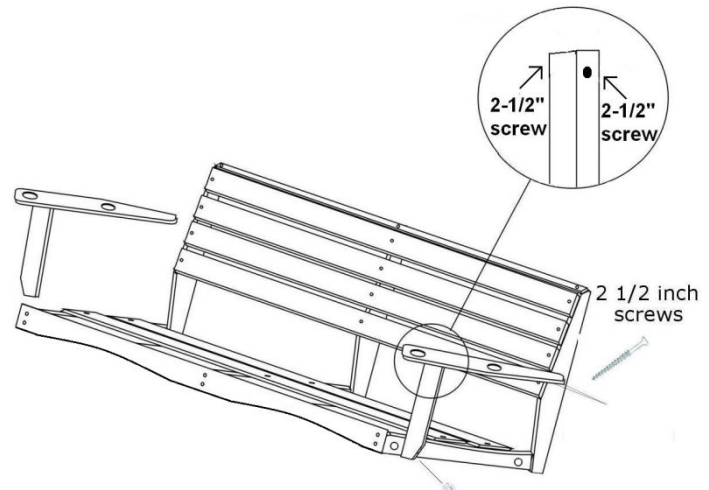

STEP 6. Hardware Placement

NOTE: If you hanging distance is higher than 8 ft. you may require additional chain.

- Use washers and hex nuts to install Eye-Bolts to the pre-drilled holes located on each side of the swing.
- Use a quick link to attach 2 pieces of chain to each side of your roof beam or A-Frame. (space 50 inches apart)
- Insert the free ends of the chain through the guide holes on the arm and attach to each eyebolt using quick-links. (note: a hammer may be required to tap quick-link onto eyebolt)
- To create a gentle incline raise the front of the swing by a link or two.
- Your swing is ready for use.

