

ASSEMBLY INSTRUCTIONS FOR CHAISE LOUNGE

page 1

VIEW PICTURES CLOSELY


READ SIMPLE INSTRUCTIONS

AND BEGIN




Tools needed,
cordless drill,
two 1/2" wrenches,
red robie bit,
a friend or two clamps.

Hardware provided,
40 pcs 1 1/2" - #8 S.S. screws,
2 pcs 5/16"-18-2 1/4 S.S. HCS
2 S.S.hexagon nylon lock nuts

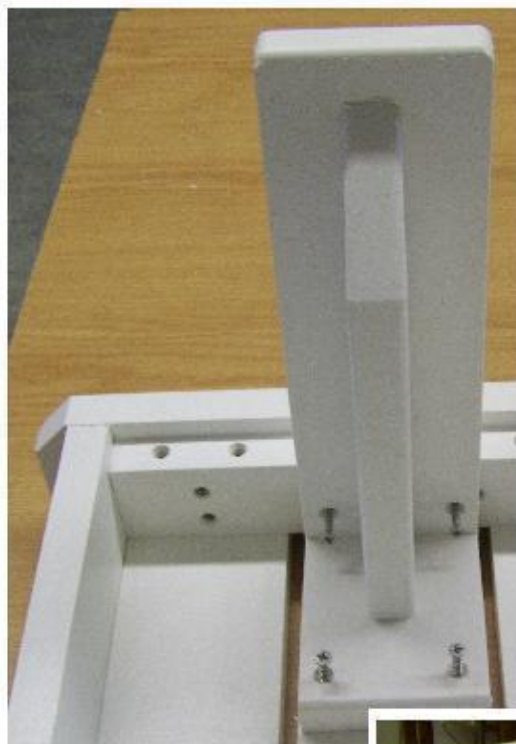

Attach 4 legs
as shown.
Using 16,
1 1/2" screws

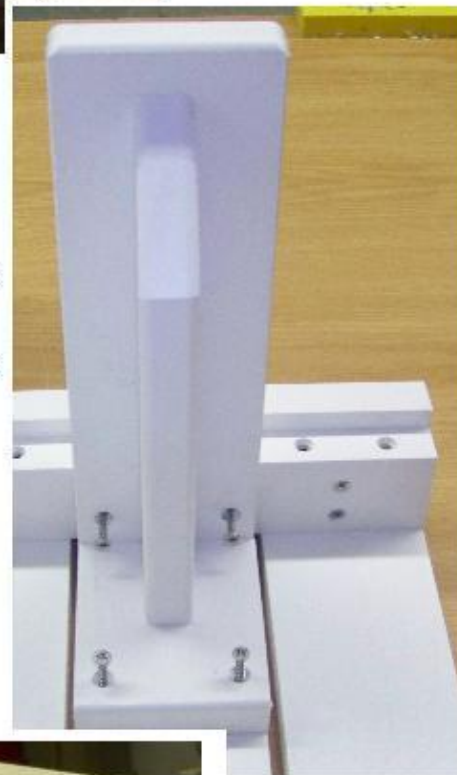



Flip over and you have

THE SEAT




BACK FRAME

PIECES A & B
12pcs, 1 1/2" screws

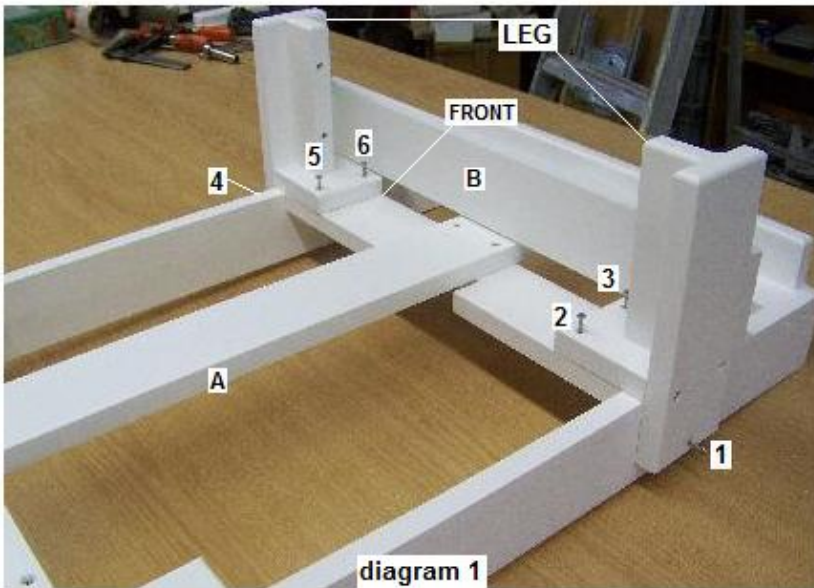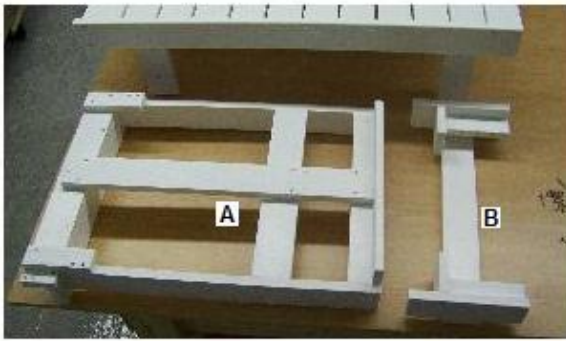

Place piece B, onto piece A and flush to front.
Using 1 1/2" screws start screwing in order shown in diagram 1.
Apply pressure on top of leg with screws 1 & 4.

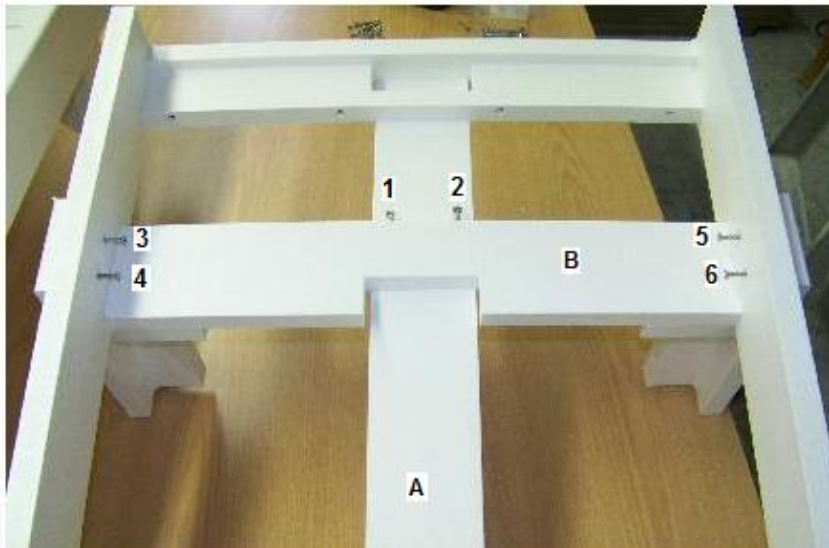

Turn over BACK FRAME and put in the other 6, 1 1/2" screws.

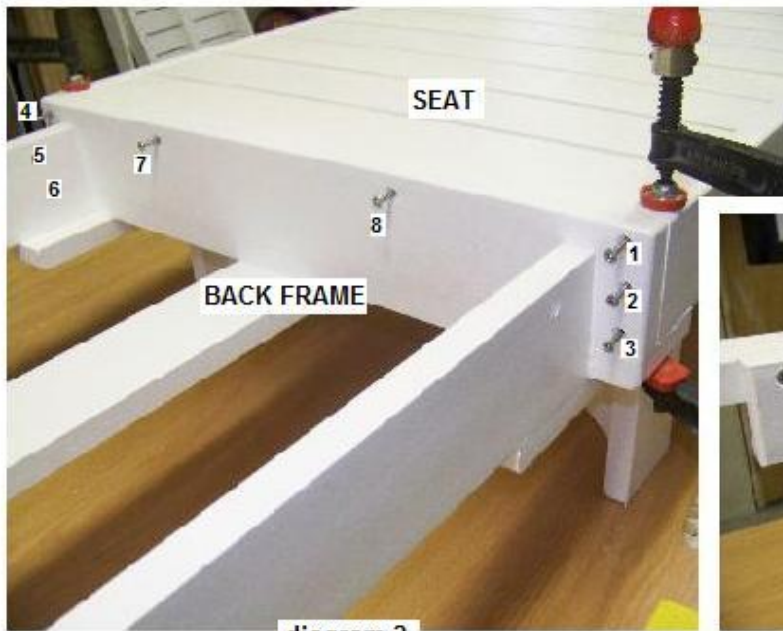


diagram 2

Join SEAT and BACK FRAME as shown in diagram 2. Flush ends and with friends help install 12 pcs. of 1 1/2" screws. Four of the screws go under the seat as show in diagram 3.

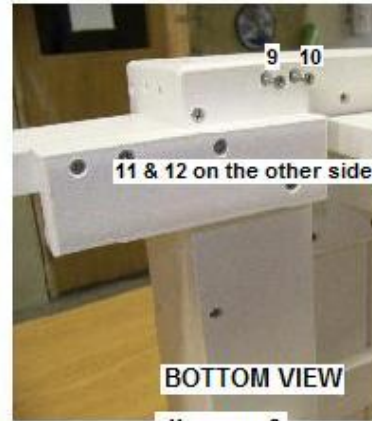


diagram 3



Place BACK into BACK FRAME. Locate holes and install 2, 2 1/2" bolts as shown in diagram 4.

Lift up BACK and tighten until only a small gap remains, as shown in diagram 5. DO NOT OVER TIGHTEN.

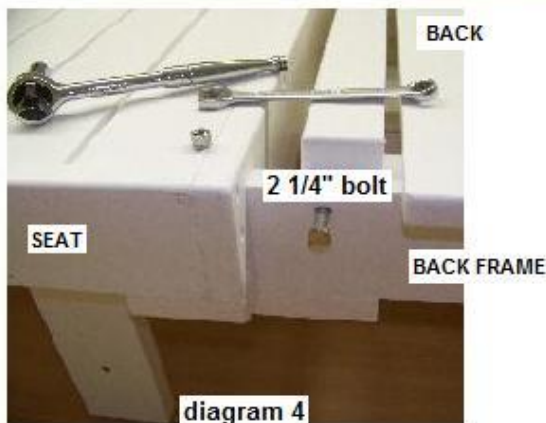


diagram 4



diagram 5

WHEELS ARE OPTIONAL

**MAKE SHURE WHEEL
TURNS AFTER TIGHTENING
LOCK NUT.**

BACK FRAME PART - B

**INSERT TWO
WASHERS**

