


# MODULAR DOOR ASSEMBLY INSTRUCTIONS

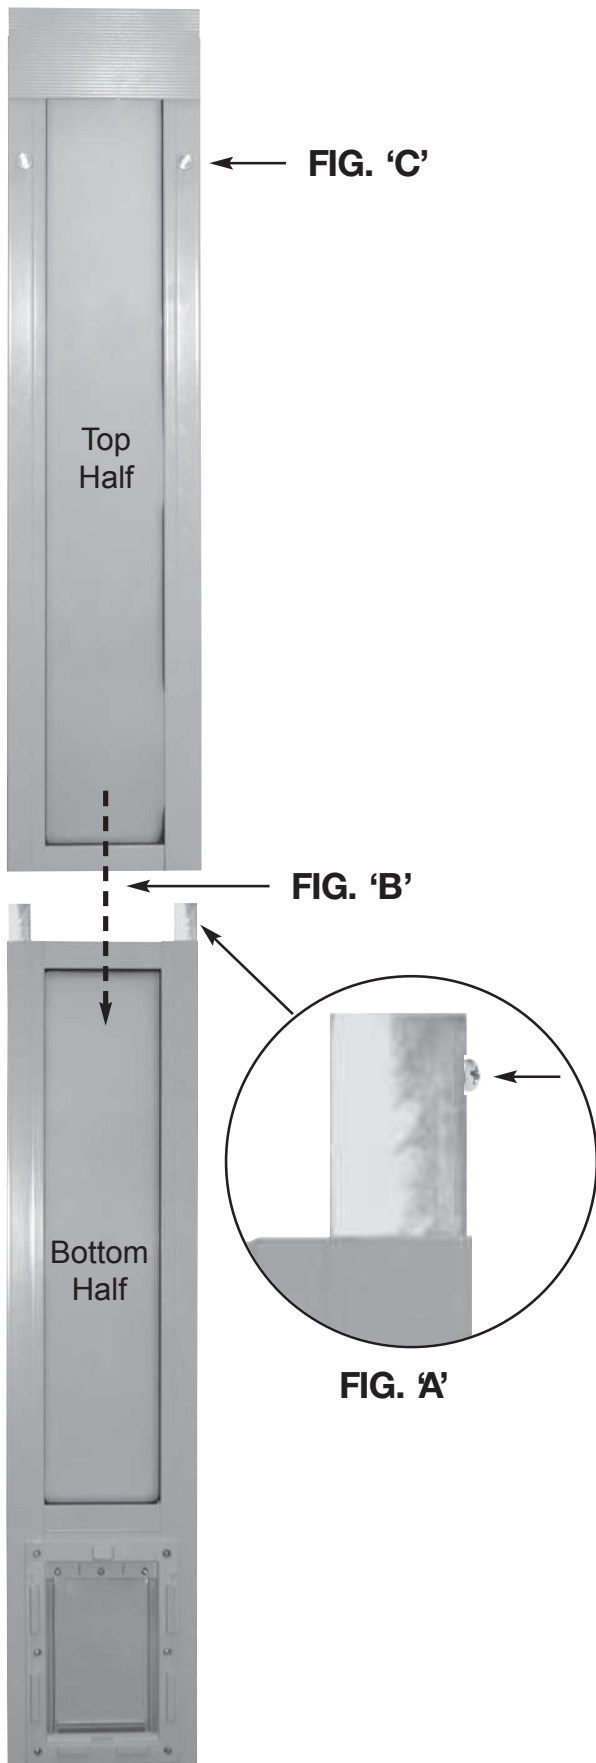

TOOLS REQUIRED:  
Phillips screw driver.

1. Remove door top and bottom halves from box.
2. Remove #8 screws from left and right inserts. See **FIG. 'A'**.
3. Carefully slide top half (without posts) onto bottom half (with posts). See **FIG. 'B'**.

**Note:** Make sure locking knobs at top of door and lockout slide are facing inside of house. See **FIG. 'C'**.

4. Install left and right side #8 screws and tightly secure with Phillips screw driver. See **FIG. 'D'**.
5. Refer to Patio Pet Door Installation instructions for installing Patio Door.

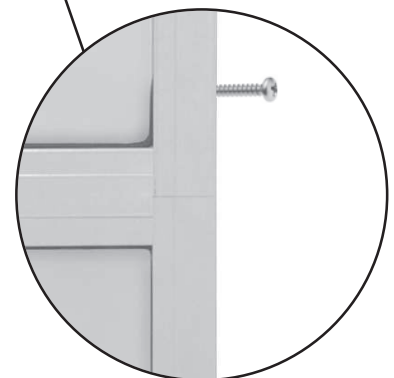


FIG. 'D'

## Fast Fit™ Panel

### GENERAL INFORMATION & INSTALLATION INSTRUCTIONS

Fast Fit™ is designed to fit into sliding glass doors and most sliding screen door openings ranging from 77<sup>5/8</sup>" to 80<sup>3/8</sup>" in height (measured from inside top track to the inside bottom track). Fast Fit™ features automatic height adjustment. Panel becomes rigid when knobs located near top of Fast Fit™ are tightened.

Fast Fit™ is designed for easy installation and removal without the use of any tools besides your own two hands and a pair of scissors. For your added protection, a security lock which can be used with or without Fast Fit™ in place has been included. Installation of security lock will require a few basic tools.

### FAST FIT™ PLACEMENT

1. Release automatic height adjustment by turning knobs located near top of panel counter-clockwise. Height adjustment panel should fully extend upward (pull up on panel if necessary).
2. Open sliding glass/screen door.
3. Insert Fast Fit™ with knobs facing inside. Place top edge into top track of sliding glass/screen door. Lift up and swing lower portion of panel onto ridge in sliding glass door (or screen door.)
4. Slide Fast Fit™ against doorjamb and make sure that top is fully extended, not tilted to one side, and bottom of panel is on ridge in bottom track (See Figure 1).
5. Hand tighten knobs by turning clockwise to lock Fast Fit™ in place.

**Important:** Testing the fit of your Fast Fit™ is imperative. To test fit lift Fast Fit™ upward. If excessive movement is evident, loosen knobs by turning counter-clockwise and pressing in. Adjust as necessary. (See Step # 4 and repeat).

6. To permanently install the Fast Fit™ you may screw through the aluminum fins that protrude on the existing frame of your door. Drill through the fins into the Fast Fit™ (See Figure 2). Two screws in the top and two in the side, approximately 1 1/2" - 2" from the bottom of door. Do not put any screws into the frame by the glass of the Fast Fit™ as breakage may occur.

7. **Optional permanent placement for fixed panel sliding door.** Remove screws that hold fixed glass panel in place and slide over. Insert the Fast Fit™ panel in space and re-fasten fixed glass panel.

### FAST FIT™ PANEL REMOVAL

1. Release automatic height adjustment by turning both knobs counter-clockwise and pressing in.
2. Lifting upward, swing lower portion of panel away from lower track.

### ATTACHING FAST FIT™ BUMPER SEAL

The purpose of the Fast Fit™ Bumper Seal is to provide a weather seal and bumper between the edge of Fast Fit™ and your sliding glass door.

1. Beginning at bottom, attach Fast Fit™ Bumper Seal on the edge of the Fast Fit™ by running Bumper Seal for its entire length and then pressing firmly into place (FIG. 3). Excess should be removed with scissors.

### ATTACHING WEATHER STRIPPING

The Weather Stripping's purpose is to seal the extra air space between your sliding glass door and stationary window created when your Fast Fit™ is in place. (FIG. 4)

1. Clean all dirt and grease off edge of surface area.
  2. Measure the vertical distance, or height of exposed glass, between top and bottom frames of the sliding door.
  3. Cut Weather Stripping to size with scissors using measurement from above.
  4. If necessary, adjust Weather Stripping width by placing on back edge of sliding glass door. Flexible vinyl on Weather Stripping should rub lightly against glass. (FIG. 4)
  5. Starting at top, attach Weather Stripping by aligning edge so that it rubs lightly against glass. Pull paper off tape and gently press in place while working slowly down the Weather Stripping. Do not press firmly in the event that repositioning is necessary.
- Note: Be sure that vinyl rubs lightly against glass all the way down length of glass.**
6. Press Weather Stripping firmly in place along entire length when you are satisfied it is correctly placed.



FIG. 1

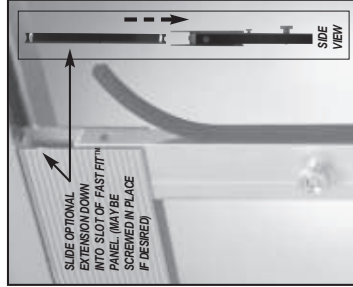


FIG. 2



FIG. 3 - PANEL BUMPER SEAL

### TRAINING YOUR PET TO USE THE FAST FIT™ PANEL

1. Close sliding glass door, with trainer on opposite side of door from pet.
2. Hold or tape flap in the open position.
3. Call or entice pet through pet entry. Do not force pet through door, training may be prolonged as a result of impatience on the part of the trainer.
4. Repeat process from the opposite side of pet door panel.
5. Call or entice pet through pet entry, but this time hold corner of flap just enough for pet to realize opening exists.
6. Repeat sequence again with flap in closed position.
7. Once pet has entered, experiencing flap contact, training has been successful. Rewarding or praising your pet after each successful attempt will reinforce use as well as accelerate training time.

FIG. 5 - LOCK PLACEMENT OPTIONS



### OPTIONAL CUSTOM EXTENSIONS

1. Available where your pet door was purchased. May be used to extend the height of your Fast Fit™ Panel (FIG. 3). Installation of extensions is quick and easy.



Valencia, California 91355 • (661) 294-2266  
www.idealpetproducts.com  
©1997, 1000 BK 007