


Metro Deluxe MEDICINE CABINET




FEATURES/TYPICAL SPECIFICATIONS

- Recess or Surface Mount Installation
 - Wall Opening/Rough-in Dimensions (for recess applications): 19" x 24" x 4"
- Formed and welded flush design steel housing (WB/ST)
 - 22 gauge steel construction with white, heat cured, acrylic paint finish
 - 1/8" thick float glass mirror on housing back
- Frameless Mirror door
 - 5/32" float glass mirror door front with 1/2" beveled edges, 4 sides
 - 3/32" float glass mirror door back with flat polished edges
 - 24 gauge steel inner core with white, heat cured, acrylic paint finish.
- 170° euro hinge with soft-close mechanism (HG02) (2 typical)
- Reversible for left-hand or right-hand door swing
- 3/16" thick float glass shelves, adjustable (ADJ) (3 typical)
- Snap-Fit shelf supports (20 typical)
- Includes installation hardware
- Standard Pallet Quantity of 16 units

Finishes:

Housing: PT01 — Basic White
 Mirror: 1/2 BVL — 1/2" Bevel Edge
 Frame: N/A

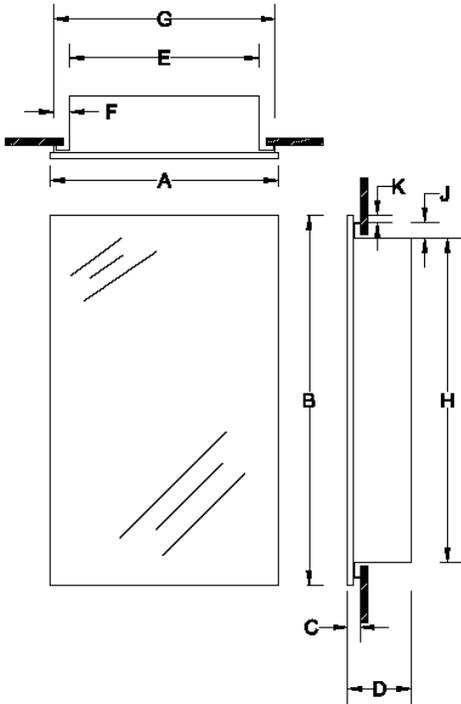

NOTE: Surface mount installation requires a Surface Mount Kit, 760025 (not included)

| | | Dimensions In Inches | | | | | | | | | |
|-----------|----------------------------------|----------------------|--------|---|---|--------|-----|----|--------|-----|---|
| Model # | Description | A | B | C | D | E | F | G | H | J | K |
| 52WH254DP | Metro DLX XL 1DR 20X25 BVL WB/ST | 20-1/8 | 25-1/8 | 1 | 5 | 18-1/2 | 3/4 | 20 | 23-1/2 | 3/4 | 0 |

| REFERENCE | QTY. | REMARKS | Project |
|-----------|------|---------|--------------|
| | | | Location |
| | | | Architect |
| | | | Engineer |
| | | | Contractor |
| | | | Submitted by |
| | | | Date |

* All models and material specifications are subject to change or withdrawal without notice.