

## INSTALLATION INSTRUCTIONS

1. Before beginning the installation, carefully unpack and identify all parts, referring to the illustration.

2. Turn the electrical power to the installation point OFF.


3. Make the wiring connections: Connect the HOUSE WHITE WIRE to the FIXTURE WHITE (or RIBBED) LEAD; connect the HOUSE BLACK (or RED) WIRE to the FIXTURE BLACK (or SMOOTH) LEAD. Connect the HOUSE GROUND WIRE and the FIXTURE GROUND LEAD.

4. Carefully tuck all wiring into the post, and position the FIXTURE BASE over the post. Secure with (2) SCREWS.

5. Restore electrical power to the circuit.

6. Install bulbs (see fixture markings and/or labels for maximum wattages).

7. Carefully fit the CAGE over the CENTER ROD, tipping the CAGE at an angle to facilitate clearing the (2) LAMP HOLDERS.

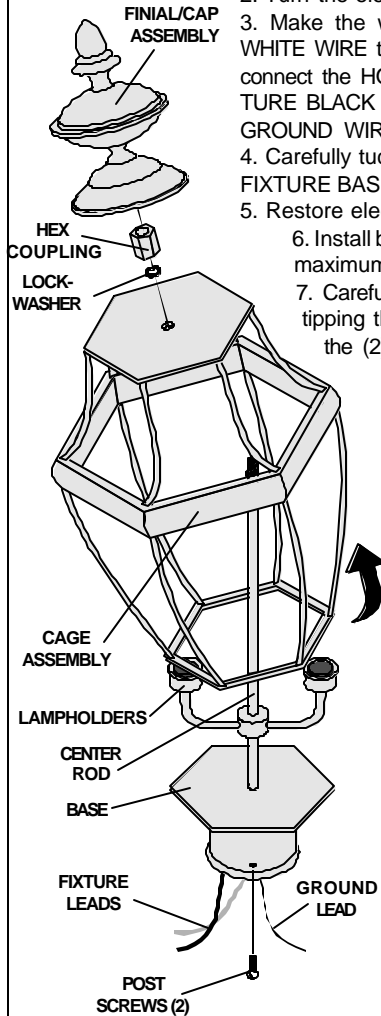

**NOTE:** When re-lamping, remove the FINIAL/CAP ASSEMBLY, HEX NUT, and LOCKWASHER. Then carefully lift the CAGE ASSEMBLY, tilting it at an angle to clear the bulbs and LAMP HOLDERS.

## INSTALLATION INSTRUCTIONS

1. Before beginning the installation, carefully unpack and identify all parts, referring to the illustration.

2. Turn the electrical power to the installation point OFF.


3. Make the wiring connections: Connect the HOUSE WHITE WIRE to the FIXTURE WHITE (or RIBBED) LEAD; connect the HOUSE BLACK (or RED) WIRE to the FIXTURE BLACK (or SMOOTH) LEAD. Connect the HOUSE GROUND WIRE and the FIXTURE GROUND LEAD.

4. Carefully tuck all wiring into the post, and position the FIXTURE BASE over the post. Secure with (2) SCREWS.

5. Restore electrical power to the circuit.

6. Install bulbs (see fixture markings and/or labels for maximum wattages).

7. Carefully fit the CAGE over the CENTER ROD, tipping the CAGE at an angle to facilitate clearing the (2) LAMP HOLDERS.

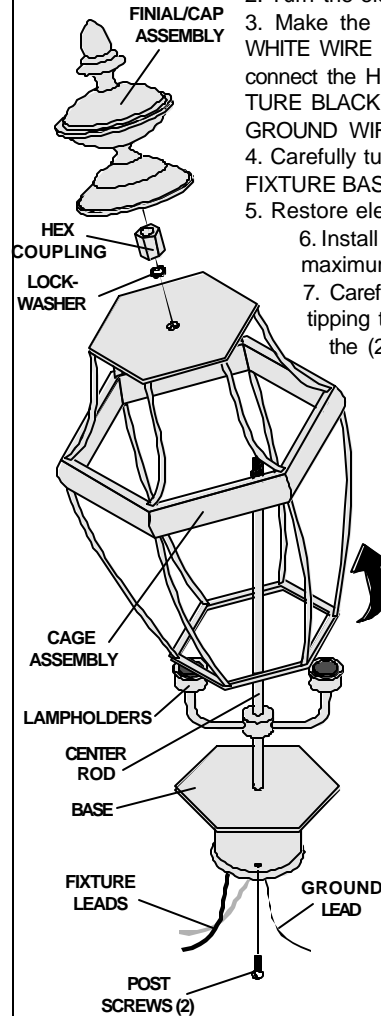

**NOTE:** When re-lamping, remove the FINIAL/CAP ASSEMBLY, HEX NUT, and LOCKWASHER. Then carefully lift the CAGE ASSEMBLY, tilting it at an angle to clear the bulbs and LAMP HOLDERS.